


EED/DS Type

POWER
TRANSFORMER
CORES


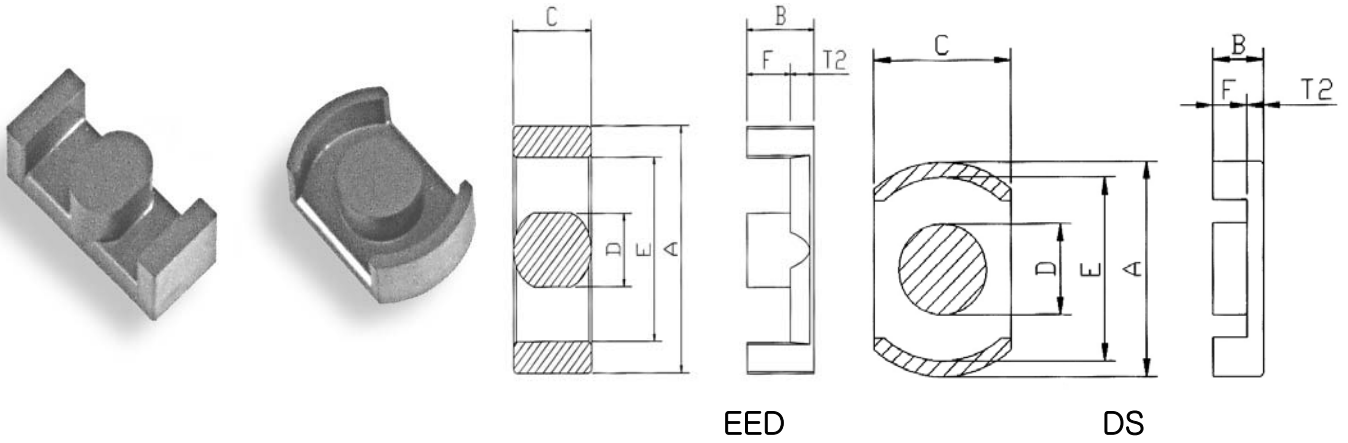


MODEL		DIMENSION (mm)						
		A	B	C	D	E	F	T2
Part No	EED 2820	28.0±0.4	10.2±0.15	11.9±0.15	8.5±0.15	20.4min	6.6±0.15	3.6
	DS 2311	22.9±0.45	5.55±0.15	15.2±0.25	18.25±0.3	9.75±0.15	3.75±0.15	1.8
	DS 2515	25.5±0.55	7.7±0.1	17.09±0.2	8.5±0.15	20.4min	6.6±0.15	1.1
	DS 2716	27.0±0.55	7.9±0.2	18.0±0.2	12.5max	22.7min	5.3min	2.6



MODEL		Le(mm)	Ae(mm ²)	Ve(mm ³)	C ₁ (mm)	AL Value(nH/N ²)				
						YP2	YN2	YH5	YH8	YH10
Part No	EED 2820	47.1	86.2	4060	0.55	3200				
	DS 2311	26.8	51.2	1372	0.52	4400			11800	14000
	DS 2515	38.4	77.0	2956	0.5	3400				
	DS 2716	38.2	88.7	3388	0.43					

EP/RS Type


POWER
TRANSFORMER
CORES

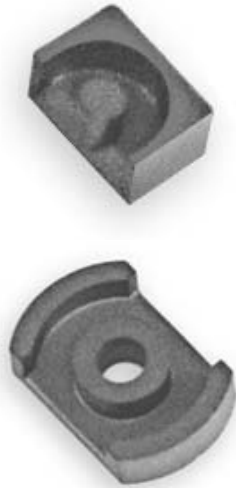

EP



RS




MODEL		DIMENSION (mm)							
		A	B	C	D	E	F	H	T ₂
Part No	EP 7	9.2±0.2	3.7±0.1	6.35±0.15	3.3±0.1	7.4±0.2	2.6±0.1		1.1
	EP 10	11.5±0.3	5.1±0.1	7.65±0.2	3.3±0.2	9.4±0.2	3.7±0.1		1.4
	EP 13	12.5±0.3	6.42±0.15	8.8±0.2	4.35±0.15	10.0±0.3	4.6±0.1		1.82
	RS 2311R	22.9±0.45	5.55±0.15		9.75±0.15	18.25±0.3	3.75±0.15	3.75±0.15	1.8
	RS 2311S	22.9±0.45	5.55±0.15	15.2±0.25	9.75±0.15	18.25±0.3	3.75±0.15	3.75±0.15	1.8
	RS 2318S	22.9±0.45	9.0±0.15	15.2±0.25	18.25±0.3	9.75±0.15	7.1±0.15	5.08±0.1	1.9

MODEL		L _e (mm)	A _e (mm ²)	V _e (mm ³)	C ₁ (mm)	AL Value(nH/N ²)				
						YP2	YN2	YH5	YH8	YH10
Part No	EP 7	15.7	10.3	161.7	1.52	1100				1460
	EP 10	19.2	11.3	216.9	1.7	1200				1600
	EP 13	24.2	19.5	471.9	1.24	1600				2600
	RS 2311R	28.6	61.0	1744.6	0.47	4500		13000	15800	
	RS 2311S	28.6	61.0	1744.6	0.47	4500			13000	15800
	RS 2318S	41.6	62.2	2587.5	0.67	3500			9100	12700

PQ/RM Type

POWER
TRANSFORMER
CORES

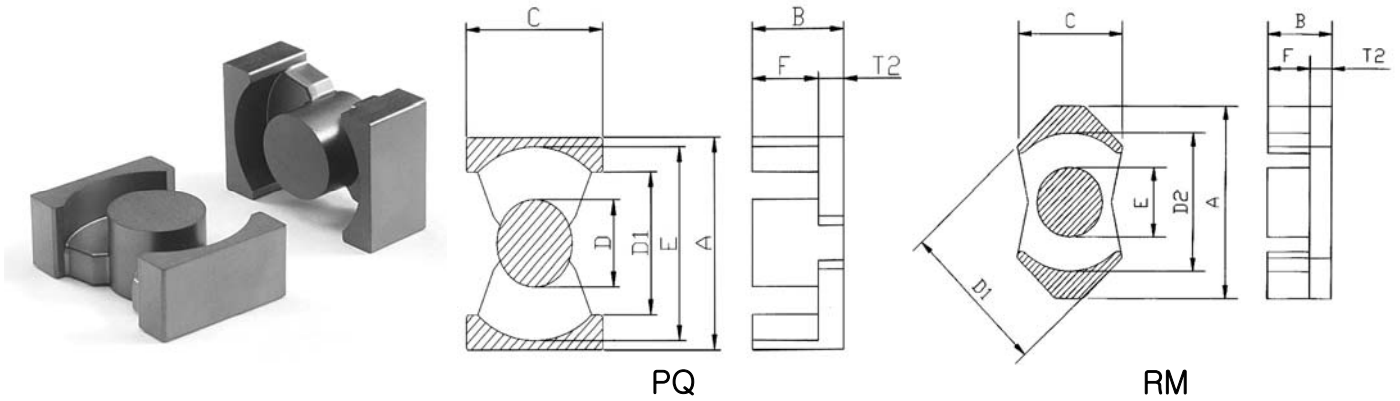

MODEL		DIMENSION (mm)							
		A	B	C	D ₁	D ₂	E	F	T ₂
Part No	PQ 2021	20.5±0.4	10.1±0.2	14.0±0.4	8.8±0.2		18.8±0.4	7.15±0.15	2.95
	PQ 2620	26.5±0.45	10.1 ^{+0.1} _{-0.15}	19.0±0.45	12.0±0.2	16.0±0.45	20.5±0.45	5.75±0.15	4.35
	PQ 2621	26.5±0.45	10.47 ^{+0.13} _{-0.12}	19.0±0.45	12.0±0.2	16.0±0.45	22.5±0.45	6.15±0.15	4.32
	PQ 2625	26.5±0.45	12.35 ^{+0.15} _{-0.10}	19.0±0.45	12.0±0.2	16.0±0.45	22.5±0.45	7.9±0.3	4.45
	PQ 3220	32.0±0.5	10.57±0.2	22.0±0.5	13.45±0.25	19.0min	27.5±0.5	6.05±0.2	4.42
	PQ 3226	32.0±0.5	13.0±0.2	22.0±0.5	27.5±0.5	19.0min	13.9±0.2	6.05±0.15	6.95
	PQ 3535	35.1±0.6	17.37±0.12	26.0±0.5	14.35±0.25	23.5min	32.0±0.5	12.5±0.15	4.87
	RM 6	17.06±0.3	6.2±0.1	8.0±0.2	14.4±0.3	12.65±0.25	6.3±0.1	4.1±0.2	2.1
	RM 8	22.75±0.3	8.2±0.1	10.8±0.2	19.3±0.4	17.3±0.3	8.4±0.15	5.5±0.2	2.7
	RM 10	27.85±0.65	9.3±0.1	13.25±0.25	24.15±0.55	21.65±0.45	10.7±0.2	6.35±0.20	2.95

MODEL		Le(mm)	Ae(mm ²)	Ve(mm ³)	C ₁ (mm)	AL Value(nH/N ²)				
						YP2	YN2	YH5	YH8	YH10
Part No	PQ 2021	45.4	62.0	2814.8	0.74	3400				
	PQ 2620	46.3	119.0	5509.7	0.36	6600				
	PQ 2621	47.1	119.0	5604.9	0.4	5050				
	PQ 2625	55.0	118.0	6490	0.47	5500				
	PQ 3220	55.5	170.0	9435	0.33	5570				
	PQ 3226	67.8	168.0	11390.4	0.4	4600				
	PQ 3535	87.9	196.0	17228.4	0.45	5700				
	RM 6	28.6	36.6	1050	0.78	2400	3800			9000
	RM 8	38.0	64.0	2430	0.59	3300	5180			13000
	RM 10	44.0	98.0	4210	0.45	4200	6650			16800